


CISA 5003/4 floor springs suitable for many applications, such as shop fronts, malls, internal doors, office buildings. The floor springs is tested to 500,000 cycle which provide reliable and durable solutions for all applications.

## Features:

- High-grade cast-iron body
- Fixed sized 3 or 4
- Robust design up to 150 kg doors
- Adjustable closing and latching speed
- Maximum door opening angle 180°
- Optional Hold open at 90°
- High efficiency mechanism offer maximum user convenience
- Comply to EN1154:1996
- Tested to 500,000 cyclic



## Dimension:

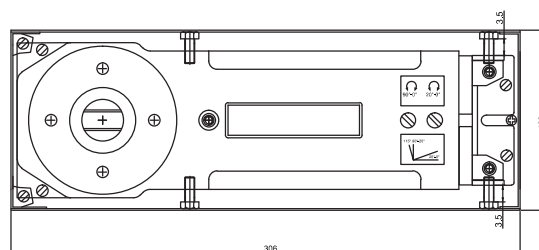

Specification	CISA 5003 EN3	CISA 5004 EN4
Closing Force acc to EN1154	EN 3	EN 4
Adjustable Closing Force	No	No
Max Door Width	950mm	1100mm
Max Door Weight	150 kg	150 kg
Adjustable Closing speed	170° - 15°	170° - 15°
Adjustable Latching Speed	15° - 0°	15° - 0°
Hold Open	Optional 90°	Optional 90°
Max Opening Angle (Hinge Side)	180°	180°
Back Check	-	-
Delay Action	-	-
Handling	Non-Handled	Non-Handled
Dimension in mm	305mm (L) / 108mm (W) / 41mm (H)	305mm (L) / 108mm (W) / 41mm (H)
Extended Spindle	10 / 15 / 20 / 25 / 30 / 40 / 45 / 50mm	10 / 15 / 20 / 25 / 30 / 40 / 45 / 50mm
Compliance	EN1154:1996 (Pending)	EN1154:1996